


3"


MANUAL OR POWER REWIND REELS

To handle 2" through 3" I.D. hose.

- Rugged, industrial-duty channel frame construction.
- Gear-driven crank rewind or chain and sprocket drive powered by an electric, hydraulic or compressed air motor.
- Pinion shaft brake as auxiliary crank rewind on power reels, at extra cost.
- Crank rewind supplied with pinion brake, power reels with comet brake. Other brakes and locking devices may be specified.
- 90° ball bearing swivel joint with 3" victaulic groove.
- Flanged riser with 3" female NPT threads.
- Consult factory for other sizes and/or threads.
- Standard inlet, outlet riser and hub assembly are aluminum for jet fuels.
- Rollers and roller mounting brackets are accessory items. Specify roller position.
- Pressures to 150 psi (10 bar)
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Consult factory for other pressures and temperatures.

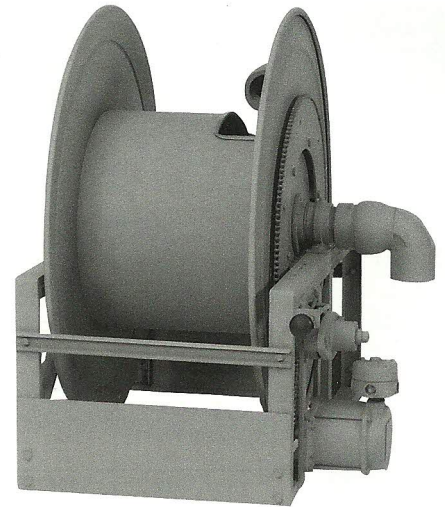

Shown with Clutch-Reduction unit

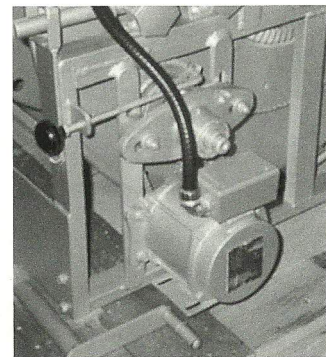

Chain Clutch - Reduction Units

- Standard on reels with 39" diameter or larger discs, or when increased torque and slower rewind speeds are required.
- Factory-installed.