

5000

SINGLE WRAP POWER REWIND REELS

To handle single 1-1/2" I.D. through 3" I.D. hose.

- Effortless and fast rewinding, wrapping, guiding of hose.
- Chain and sprocket drive powered by electric, hydraulic, or compressed air motor.
- Auxiliary crank rewind, optional.
- 12 volt rewind, comet brake, reduction unit standard.
- Air brake optional.
- Inlet, hub assembly is aluminum and/or stainless steel for jet fuel.
- Consult factory for other pressures & temps.

Series 5100


- 90° ball bearing swivel joint 1-1/2" female NPT threads, 2" victaulic groove, flanged riser with 1-1/2" female NPT threads.
- Pressures to 600 psi (41 bar).
- Temperatures from -40° F to +175° F (-40° C to +79° C).

Series 5200


- 90° ball bearing swivel joint 2" victaulic groove, flanged riser with 2" female NPT threads.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).

Series 5300

- I-hub straight 3" victaulic groove inlet, flanged riser with 3" female NPT threads.
- Pressures to 150 psi (10 bar).
- Temperatures from -20° F to +225° F (-29° C to +107° C).
- Optional 90° ball bearing alum swivel joint 3" victaulic groove, flanged riser with 3" female NPT threads.

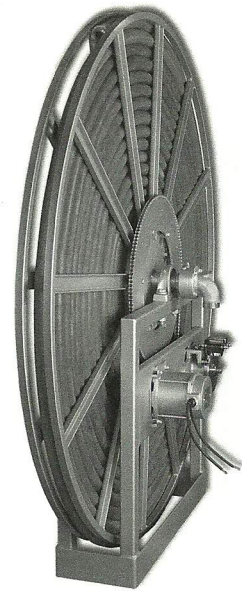

Standard Model Shown
(Hose not included)

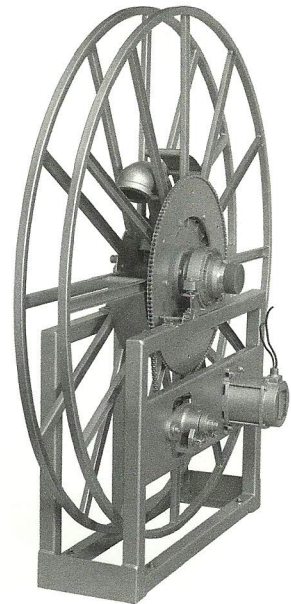

Standard Configuration
5300 Series



Standard Victaulic Version
I-hub for 5300 Series